

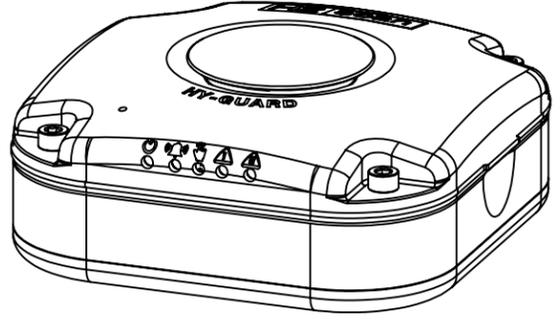
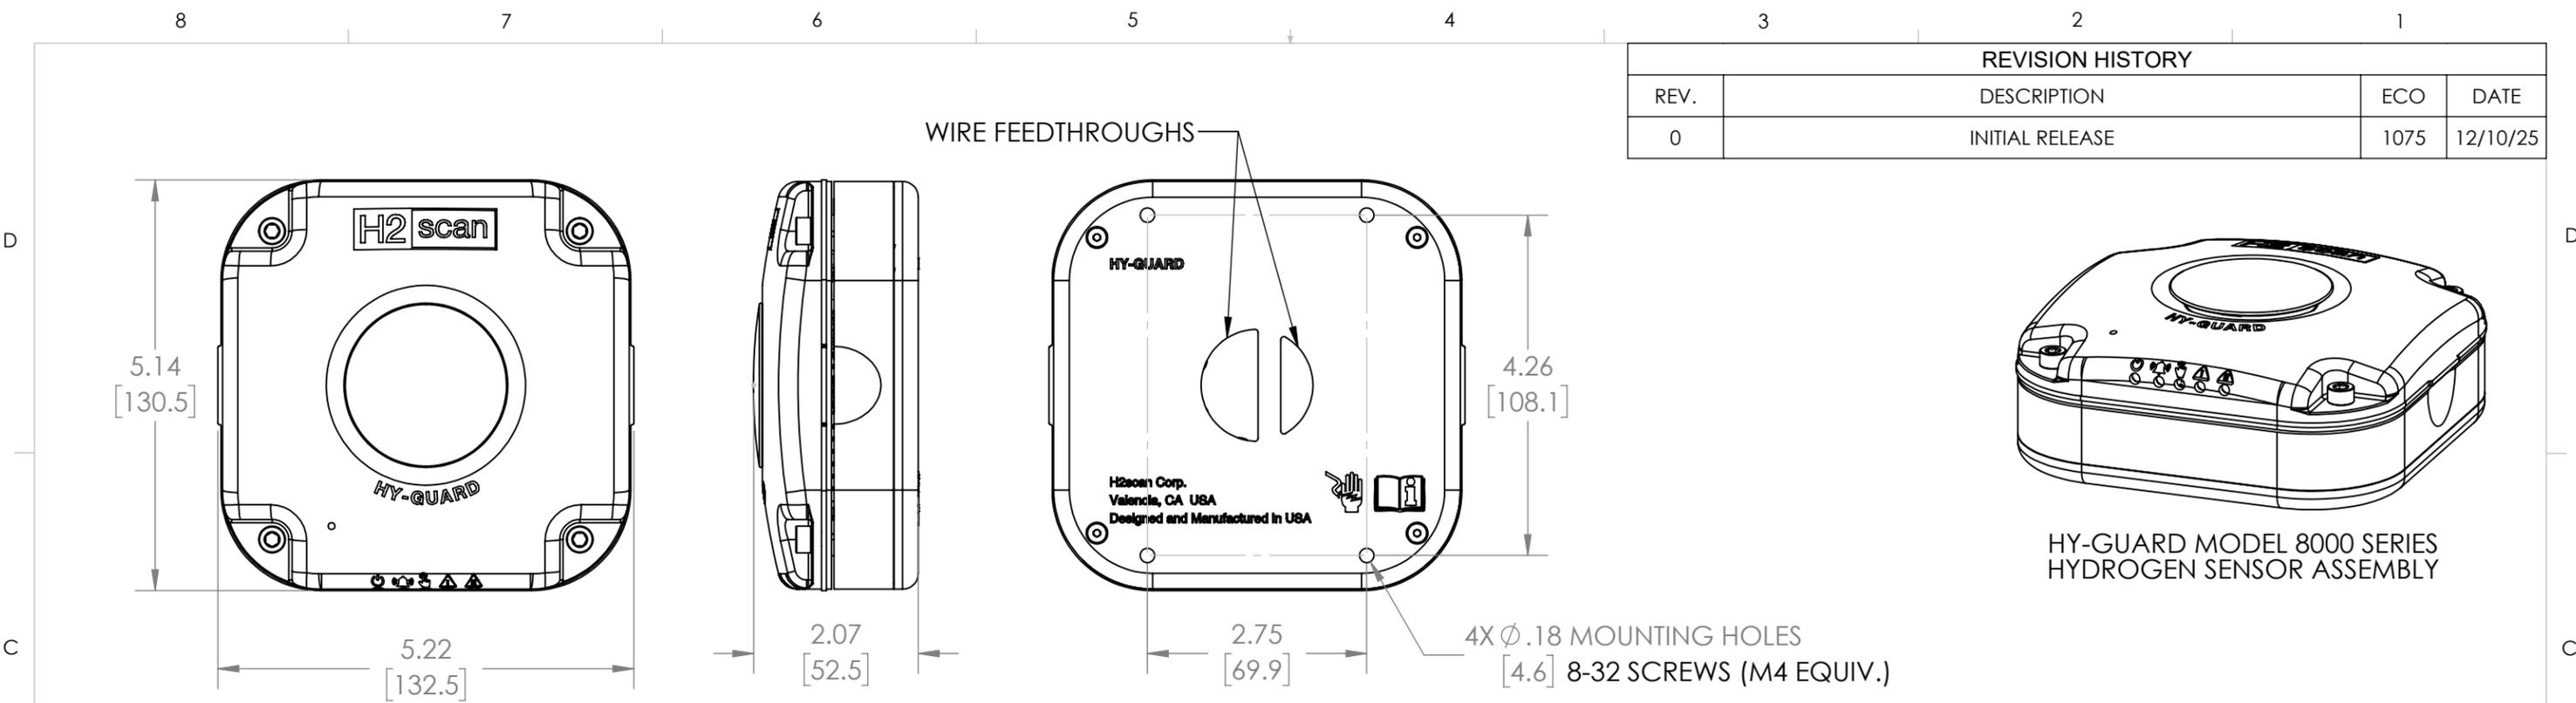


REVISION HISTORY			
REV.	DESCRIPTION	ECO	DATE
0	INITIAL RELEASE	1075	12/10/25

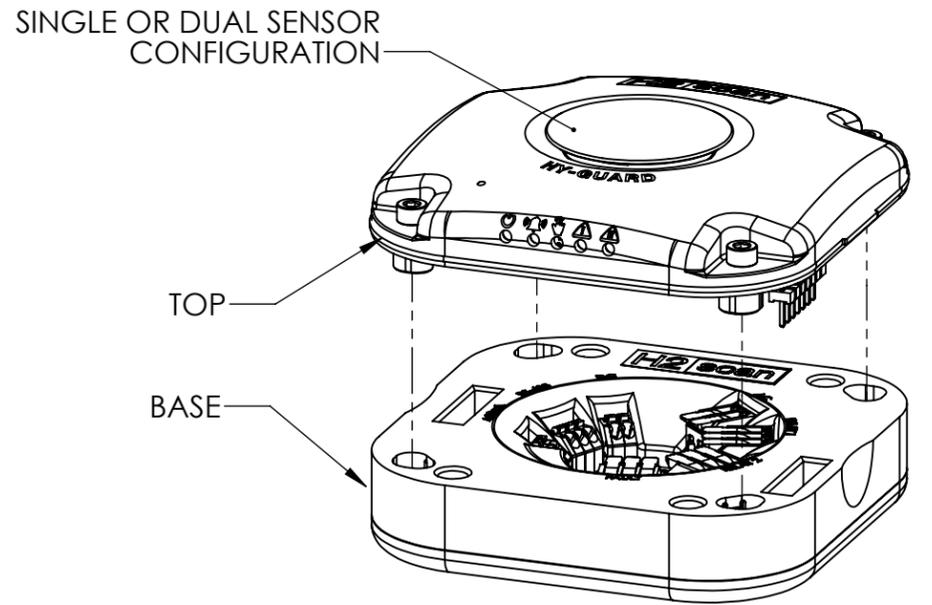


HY-GUARD MODEL 8000 SERIES HYDROGEN SENSOR ASSEMBLY

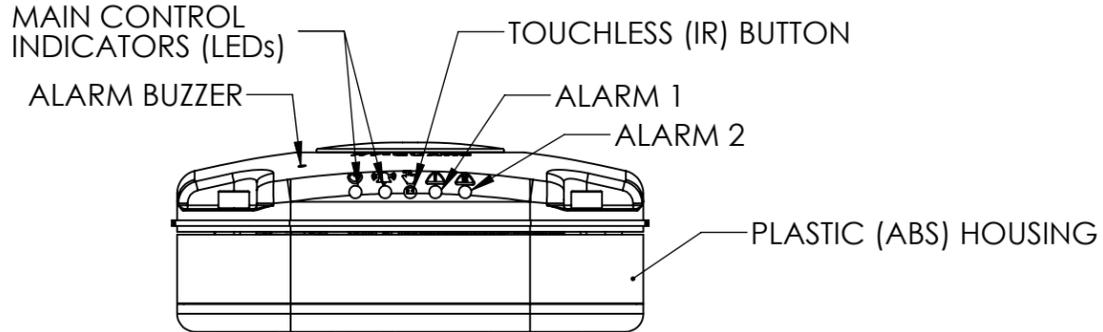

NOTES, UNLESS OTHERWISE SPECIFIED:

- RATED VOLTAGE
 - 85-264 VAC, 50/60 Hz
 - 15-60 VDC
- RATED POWER: 10W MAX
- WIRE GAUGE
 - AC: 12-24 AWG
 - DC: 14-20 AWG
 - MODBUS: 20-24 AWG

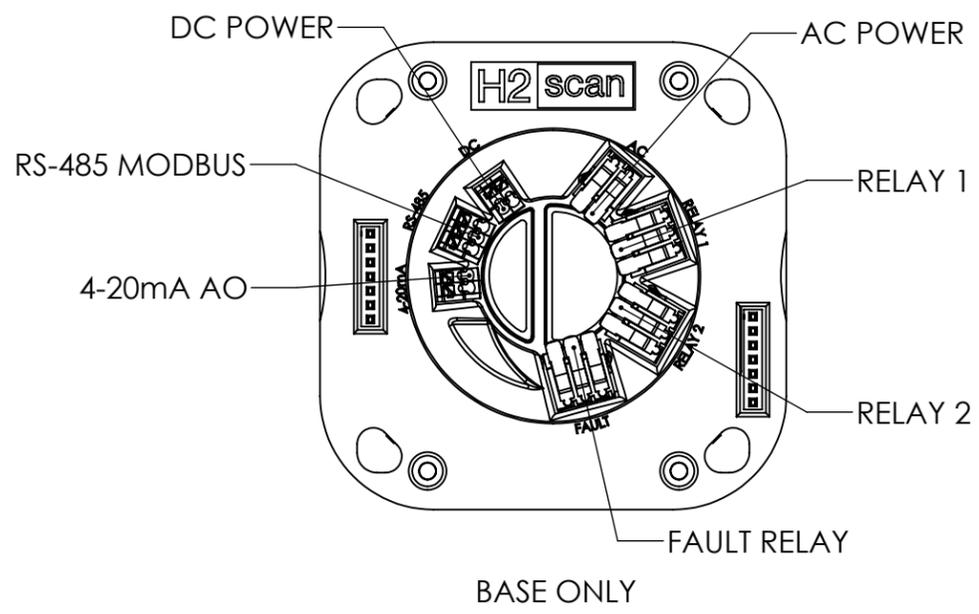

BASE ONLY

NAME	DATE	UNLESS OTHERWISE SPECIFIED
DRAWN BY: C. THOMPSON	12/8/25	ANGULAR TOLERANCE - ±1° LINEAR - HUNDREDTHS .XX ±.01 THOUSANDTHS .XXX ±.005
DO NOT SCALE DRAWING		32 SURFACE ROUGHNESS PER ASME B46.1-2019
PROPRIETARY AND CONFIDENTIAL		DIMENSIONS ARE IN INCHES
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF H2SCAN CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF H2SCAN CORPORATION IS PROHIBITED.		REMOVE ALL BURRS AND BREAK SHARP EDGES
		INTERPRET GEOMETRIC TOLERANCING PER ASME Y14.100-2017
		MATERIAL
		FINISH



HY-GUARD PRODUCTION ASSEMBLY, LTDS

SIZE	CAGE CODE	DWG. NO.	REV.
B	36NL8	50000124-LTDS	0
SCALE: 1:2	WEIGHT:	SHEET 1 OF 1	