

LITHIUM-ION HYDROGEN SAFETY SYSTEM

HY-GUARD[®] RS & HY-SIGHT[™]

H2scan[®]
Monitor. Manage. Momentum.

Integrated hydrogen safety system with real-time detection, alarms, visualization and facility-wide monitoring



The HY-GUARD RS continuously monitors hydrogen with self-calibration in standby power & energy storage battery applications, and automatically triggers ventilation, shutdown and alarms. The system gives personnel earlier warning, long-term stability, and confidence in responses through utilizing the HY-SIGHT controller/display.

ALWAYS
ALERT



CONTINUOUS HYDROGEN MONITORING

Continuously monitors hydrogen in air and provides real-time hydrogen concentration readings from HY-GUARD RS sensors.


LONG-LIFE
ACCURACY



ACCURATE SELF-CALIBRATION

Delivers accurate, real-time hydrogen measurement with fast response using self-calibration solid-state sensor technology with 10+ year service life.

WIRED TO
RESPOND



RELAY OUTPUTS FOR SAFETY SYSTEMS

Configurable relay outputs drive ventilation, equipment shutdown, and other safety systems automatically, turning into immediate action.


PROACTIVE
WARNING



VISIBLE AND AUDIBLE AT THE POINT OF RISK

Vibrant LEDs and display with audible alarm provide clear local alerting with integrated alarm managed on HY-SIGHT.

WORKS WITH
YOUR SETUP



FULL SYSTEM INTEGRATION

Monitor and manage up to four HY-GUARD RS sensors from a single HY-SIGHT display for real-time visibility and control.

HISTORICAL DATA
AVAILABLE 24/7



RELIABLE AND LOW MAINTENANCE

Infrastructure-grade safety runs uninterrupted without consumables, site visits or added workload, so operations keep moving.



Normal (Green)



Low Alarm (Yellow)



High Alarm (Red)

POWER & COMMUNICATION

- AC and/or DC Power Input
- 4-20 mA Analog Output
- Modbus RTU/RS-485 and Dry Contact

INSTALL ANYWHERE

However your battery cabinet or room is designed, HY-GUARD RS installs in minutes.

- PUNCH OUT
- JUNCTION BOX
- WALL MOUNT*
- DIN RAIL*
- SURFACE MOUNT*

* Requires additional universal adapter plate accessory.


H2scan brings situational intelligence to hydrogen-critical environments. Continuous monitoring, self-calibration and zero false alarms turn hydrogen data into operational confidence with fewer interruptions, less downtime, and more momentum.

HY-GUARD® RS & HY-SIGHT™

HY-SIGHT SPECIFICATIONS


Display	2.1", 480x480 IPS with rotary encoder
Sensors	Up to 4 HY-GUARD RS sensors
Speaker	Audible output for local indication
Communication	RS-485 (Modbus RTU), USB-C (Service)
Power Supply	AC: 85-264 VAC, 50/60 Hz DC: 12-48 VDC
Power	5 W Max
Operating Temp	3°C to 50°C (37°F to 122°F)
Storage Temp	-20°C to 60°C (-4°F to 140°F)
Mounting	Wall Mount, Junction Box, or Punch Out
Dimensions	5.1 x 5.1 x 3.1 in
Certifications	IEC 61010, CE, FCC Part 15, REACH, RoHS (all certifications pending)

HY-SIGHT DIMENSIONS

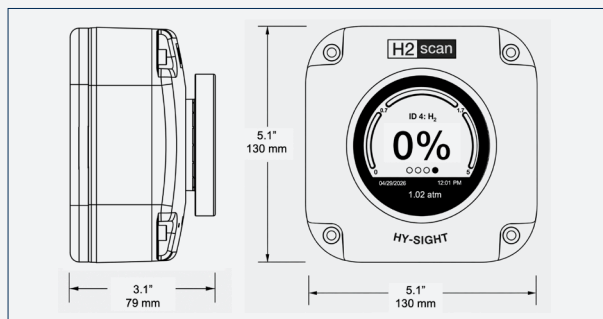


HY-GUARD PLACEMENT TOOL

Sensor placement with analysis and reports are available through H2scan's HY-GUARD Placement Tool to optimize coverage and system performance.

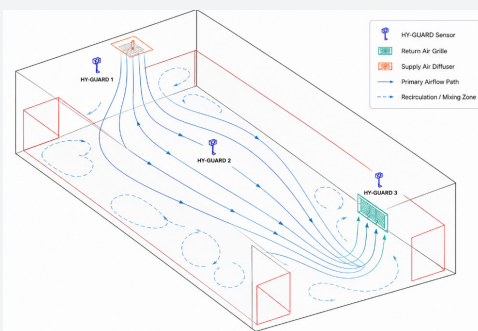

SYSTEM ARCHITECTURE WITH HY-SIGHT™

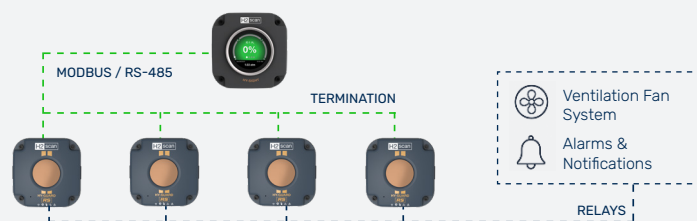

HY-SIGHT is the Modbus master and polls up to four (4) HY-GUARD sensors. Communication: Modbus over RS-485 (2-wire)

HY-GUARD RS SPECIFICATIONS

H ₂ Range	0.4–5%
Accuracy ¹	±0.3% H ₂ (Absolute Error)
Response Time ²	10 seconds
Operational Temp	-25°C to 50°C (-13°F to 122°F)
Rated Temp	15°C to 40°C (59°F to 104°F)
Storage Temp	-40°C to 70°C (-40°F to 158°F)
Humidity	0–95% RH non-condensing
Connector Type	Relay 1%, Relay 2%, Fault, RS-485, 4–20 mA, AC & DC
Voltage	AC: 110–240 VAC DC: 15–60 VDC
Power	10 W Max
Communication	Analog Output: 4–20 nominal RS-485: Modbus two-wire
Dimensions	5.1 x 5.1 x 2.1 in
Buzzer	Audible output for local indication
Certifications	IEC 61010, CE, FCC Part 15, REACH, RoHS (all certifications pending)


¹Concentrations >2% have an accuracy of ±1%. Prolonged exposure to hydrogen concentrations >5% may damage the sensor

²Time to trigger first alarm when transitioning from air to 5% H₂

ALARM LEVELS

Alarm 1 (Low)	1.0% H ₂
Alarm 2 (High)	2.0% H ₂
Fault	Sensor / System Fault

DIMENSIONS

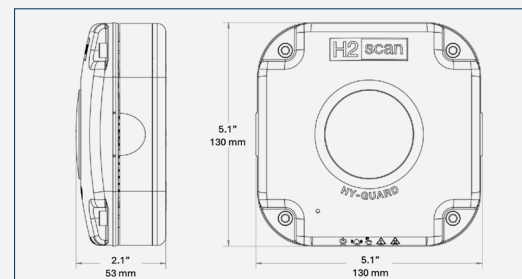

ORDERING INFORMATION

Description	Part Number
HY-GUARD RS	108350
HY-SIGHT	108250
4x HY-GUARD RS & HY-SIGHT	105920
Validation Shield Assy, HY-GUARD	50000201
H2scan Standard Bump Kit	105923-KIT
H2scan Standard Bump Kit Gas Replacement	105924-KIT
Universal Adapter Plate	108-KIT